


SLP125-24M

High Efficiency Multicrystalline PV Module

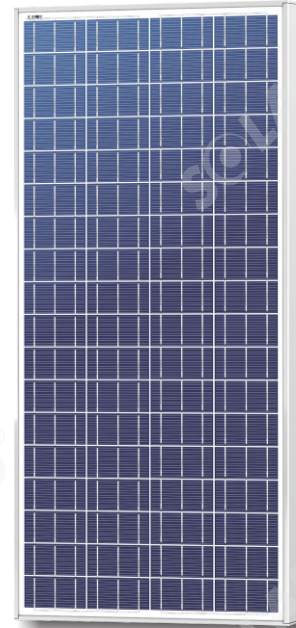


Electrical Characteristics	SLP125-24M
Product code	125012408A
Maximum power (Pmax)	125W
Voltage at Pmax (Vmp)	34.4V
Current at Pmax (Imp)	3.64A
Open-circuit voltage (Voc)	43.2V
Short-circuit current (Isc)	4.05A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 5%

*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

*NOCT: Nominal operating cell temperature (the data is only for reference)


Module Diagram

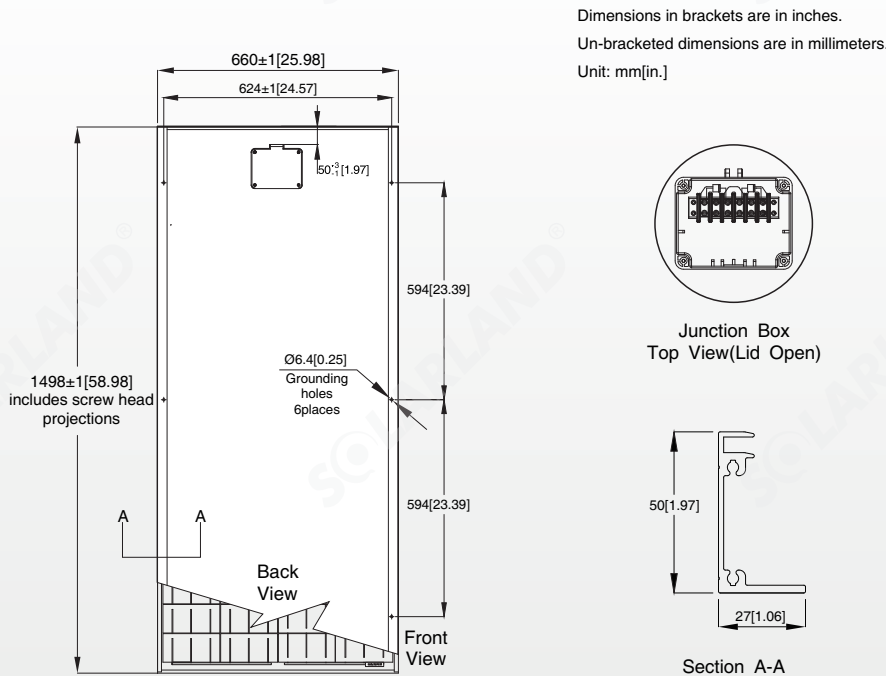

Features

- Nominal 24V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

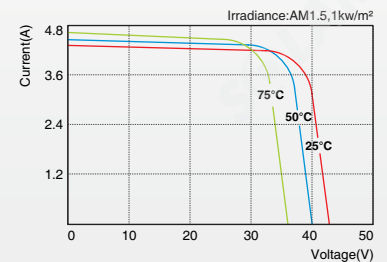

SLP125-24M I-V Curves

Specifications	SLP125-24M
Cells	Polycrystalline silicon solar cell
No. of cells and connections	72(4X18)
Module dimension	1498mm[58.98in.]x660mm[25.98in.]x50mm[1.97in.]
Weight	12.1kg[26.68lbs]
Packing information(Carton)	1545mm[60.83in.]x705mm[27.76in.]x85mm[3.35in.]/(1pc/ctn)

*Limited warranty: 5-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output; 25-year limited warranty of 80% power output. For detail, please contact us.

*Specifications are subject to change without notice at any time.